

July 19, 2010

Prepared by:  
KBA Architects  
Knight, Bagge & Anderson, Inc.  
6 Thirteenth Street  
Charlestown, MA 02129  
Tel 617-241-2807 Fax 617-241-2857

### **ADDENDUM NO. 1**

The attention of the bidders submitting proposals for the above project is called to the following Addendum to the Project Manual and Plans.

The items set forth herein, whether of omission, addition or substitution are to be included in and form part of the proposal submitted.

The number of this Addendum No. 1 must be entered in the space provided in the FORM FOR GENERAL BID. Failure to acknowledge this addendum on the Form for General Bid could result in the rejection of the bid.

This Addendum consists of 2 pages and 2 attachments: SKA – 1 & SKA – 2

#### **CHANGES TO THE DRAWINGS**

Item No. 1: Drawing A2.1: Delete detail 4/A2.1 in its entirety and insert Detail 4/A2.1 revised which is on SKA-1 attached to this addendum.

Item No. 2: Drawing A2.1: Insert details A/SKA2 and B/SKA2 found on SKA-2 which is attached to this addendum. These sketches clarify the detail of closing off the partitions to the window wall at window Type E.

#### **CHANGES TO THE PROJECT MANUAL**

Item No. 3: Note: All permit fees have been waived for this project.

Item No. 4: Section 08100 Metal Frames and fiberglass doors.

Part 2 – Products

Article 2.01 Hollow Metal Frames

Delete this article in its entirety and insert the following:

2.01 Aluminum Frames

“A. All new exterior frames shall be fabricated of 6063-T5 aluminum alloy extrusions, minimum wall thickness of 1/8”.

B. Stops shall be 7/16” secured at ends and every 10”.

C. 1/2” aluminum bar stop reinforcement shall be installed under the door stop, closer, strike and mullion/center post locations.”

Item No. 5: Section 08500 Aluminum Windows

Part 2 – Products

Article 2.01 F. Finish

Delete; “Color is to be an exotic color with an XL coating...” and insert the following; “Color shall be selected from the manufacturer’s standard color selection, as selected by the Architect.”

Item No. 6: Section 08500 Aluminum Windows

Part 2 – Products

Article 2.01 K. Light diffusing insulated glass


Delete this article in its entirety.

Item No. 7: Section 08700 Finish Hardware  
Part 2 – Products

Article 2.02 Hardware Sets.

Clarification – All new doors shall receive new hardware. Each leaf shall receive a continuous hinge, closer, holder, exit device, weather stripping and a threshold. At door types 3 and 9 only, reuse the existing hardware in installing the existing doors in the new frames. At door type 8, no new hardware is required.

END OF ADDENDUM

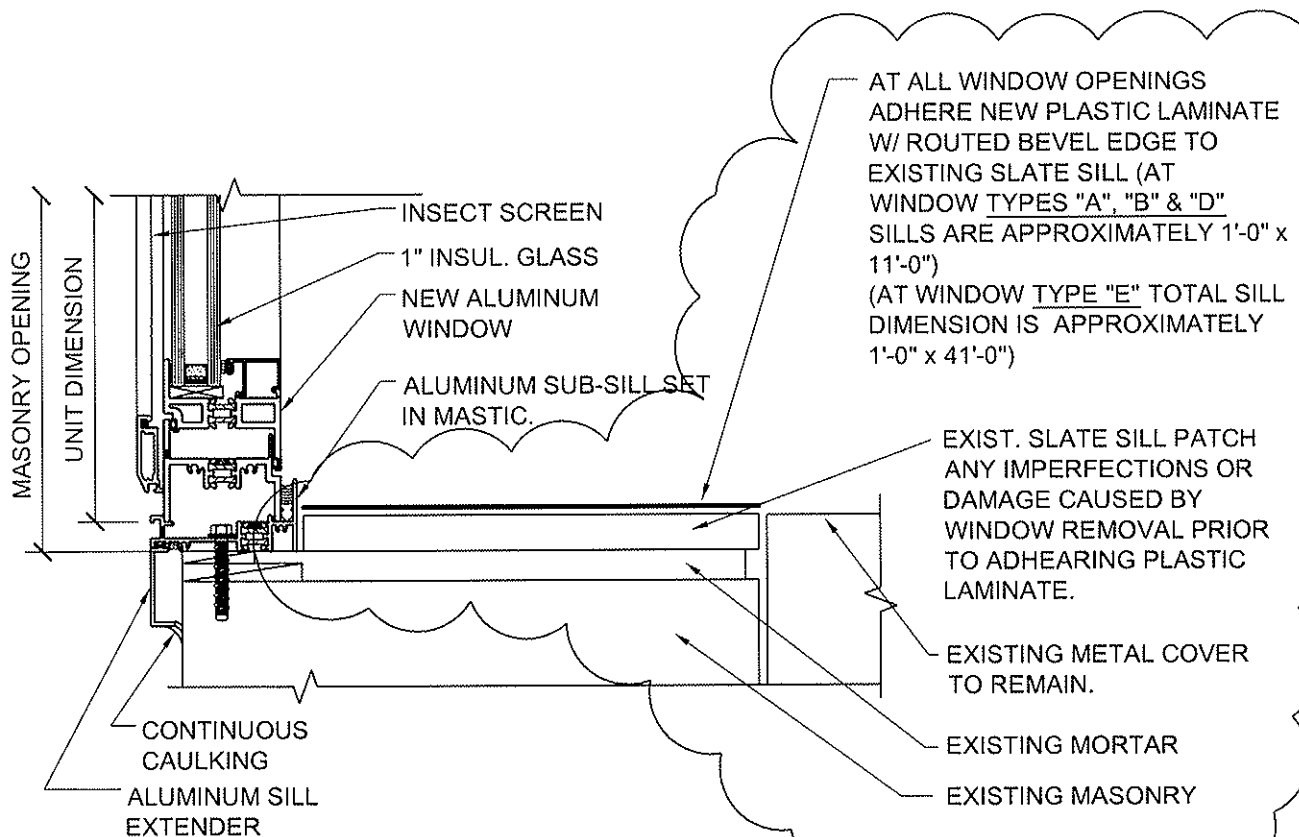

4  
A2.1

**SILL DETAIL**

SCALE: 3" = 1'-0"

REVISED

WINDOW REPLACEMENT TO THE  
BURR ELEMENTARY SCHOOL

**SILL DETAIL**  
(MODIFIES DETAILS 4/A2.1,  
22/A2.1 & 23/A2.1)

JOB NO. S112110-J


DATE 7/19/2010

PLAN NO.


**SKA-1**



6 THIRTEENTH STREET  
CHARLESTOWN, MA. 02129  
617-241-2807 (T)  
617-241-2857 (F)

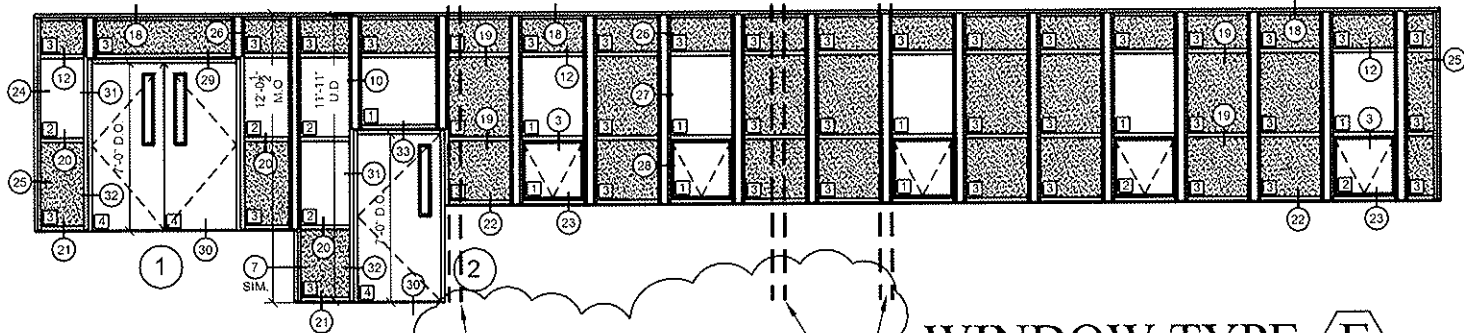

**WINDOW TYPE E**  
 SCALE: 1/8" = 1'-0"

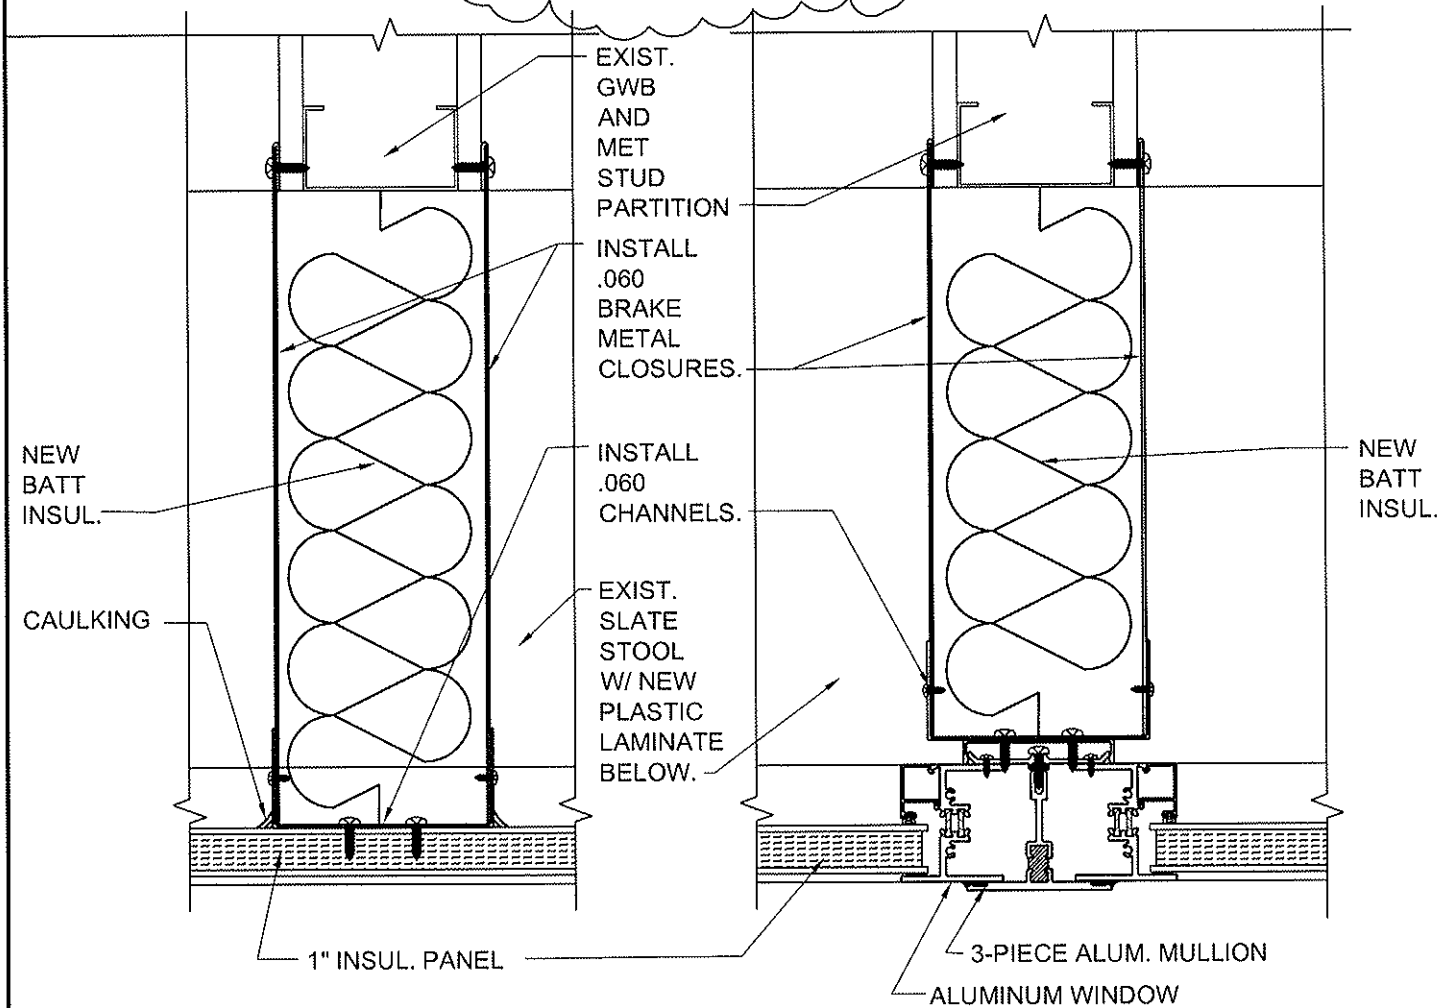

**A**  
**SKA2**  
**FIXED PANEL @**  
**@ INTERIOR PTN.**  
 FIXED WINDOW TO FIXED WINDOW  
 SCALE: 3" = 1'-0"

**B**  
**SKA2**  
**VERTICAL MULLION @**  
**@ INTERIOR PTN.**  
 FIXED WINDOW TO FIXED WINDOW  
 SCALE: 3" = 1'-0"

WINDOW REPLACEMENT TO THE BURR ELEMENTARY SCHOOL	<u>INTERIOR PARTITION</u> <u>CLOSURE DETAILS</u>	JOB NO. S112110-J
<div data-bbox="105 1900 446 1984" data-label="Image"> </div> <div data-bbox="479 1900 682 1984" data-label="Text"> <p>6 THIRTEENTH STREET          CHARLESTOWN, MA. 02129          617-241-2807 (T)          617-241-2857 (F)</p> </div>		DATE 7/19/2010
		PLAN NO. <b>SKA-2</b>